

SHOP A LED CORNER180

Continuous Line and Batten Luminaires



Images for the product family and options:



Description:	Suspended continuous line LED luminaire Light distribution type: direct Optics: lenses Housing: steel Colour: white RAL 9003
General data:	Mains voltage: 220-240V, 0/50-60Hz LED lifetime, h: 95000/L80B50 (low power versions 105000/L80B50) SDCM: 3 Protection class IEC: I Ingress protection code: IP20 Mechanical impact resistance: IK05 Operating temperature range, °C: ta 0...+35/+40
Installation:	Suspended T-join (suspension brackets and I-join kit included with each luminaire). Select CTR-BRANCH or BRANCH versions according to system layout. Through wired, 5x1.5 mm ² , three 5-pole connectors, plug and sockets
Environment:	Indoor
Application:	Retail, hall, public place

Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI* (Ra)	CCT*, K	Weight, kg
Shop A LED1x5700 J178 T830 L30 LO1 L1 L-BRANCH LL CORNER180	1132	615	65	5346	32,4	165	80+	3000	4,1
Shop A LED1x7900 J179 T830 L30 LO2 L1 L-BRANCH LL CORNER180	1132	615	65	7407	46,5	159	80+	3000	4,1
Shop A LED1x8300 J180 T830 L30 LO3 L1 L-BRANCH LL CORNER180	1132	615	65	7778	44,1	176	80+	3000	4,1
Shop A LED1x9900 J181 T830 L30 LO4 L1 L-BRANCH LL CORNER180	1132	615	65	9248	52,7	175	80+	3000	4,1
Shop A LED1x11350 J182 T830 L30 LO5 L1 L-BRANCH LL CORNER180	1132	615	65	10638	61,8	172	80+	3000	4,1
Shop A LED1x5700 J178 T840 L30 LO1 L1 L-BRANCH LL CORNER180	1132	615	65	5635	32,4	174	80+	4000	4,1
Shop A LED1x7900 J179 T840 L30 LO2 L1 L-BRANCH LL CORNER180	1132	615	65	7808	46,5	168	80+	4000	4,1
Shop A LED1x8300 J180 T840 L30 LO3 L1 L-BRANCH LL CORNER180	1132	615	65	8198	44,1	186	80+	4000	4,1
Shop A LED1x9900 J181 T840 L30 LO4 L1 L-BRANCH LL CORNER180	1132	615	65	9748	52,7	185	80+	4000	4,1
Shop A LED1x11350 J182 T840 L30 LO5 L1 L-BRANCH LL CORNER180	1132	615	65	11213	61,8	181	80+	4000	4,1
Shop A LED1x5700 J178 T830 L30 LO1 L1 R-BRANCH LL CORNER180	1132	615	65	5346	32,4	165	80+	3000	4,1
Shop A LED1x7900 J179 T830 L30 LO2 L1 R-BRANCH LL CORNER180	1132	615	65	7407	46,5	159	80+	3000	4,1
Shop A LED1x8300 J180 T830 L30 LO3 L1 R-BRANCH LL CORNER180	1132	615	65	7778	44,1	176	80+	3000	4,1
Shop A LED1x9900 J181 T830 L30 LO4 L1 R-BRANCH LL CORNER180	1132	615	65	9248	52,7	175	80+	3000	4,1
Shop A LED1x11350 J182 T830 L30 LO5 L1 R-BRANCH LL CORNER180	1132	615	65	10638	61,8	172	80+	3000	4,1
Shop A LED1x5700 J178 T840 L30 LO1 L1 R-BRANCH LL CORNER180	1132	615	65	5635	32,4	174	80+	4000	4,1
Shop A LED1x7900 J179 T840 L30 LO2 L1 R-BRANCH LL CORNER180	1132	615	65	7808	46,5	168	80+	4000	4,1

Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI* (Ra)	CCT*, K	Weight, kg
Shop A LED1x8300 J180 T840 L30 LO3 L1 R-BRANCH LL CORNER180	1132	615	65	8198	44,1	186	80+	4000	4,1
Shop A LED1x9900 J181 T840 L30 LO4 L1 R-BRANCH LL CORNER180	1132	615	65	9748	52,7	185	80+	4000	4,1
Shop A LED1x11350 J182 T840 L30 LO5 L1 R-BRANCH LL CORNER180	1132	615	65	11213	61,8	181	80+	4000	4,1
Shop A LED1x5700 J565 T830 L30 LO1 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	5346	32,4	165	80+	3000	3,7
Shop A LED1x7900 J566 T830 L30 LO2 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7407	46,5	159	80+	3000	3,7
Shop A LED1x8300 J567 T830 L30 LO3 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7778	44,1	176	80+	3000	3,7
Shop A LED1x9900 J568 T830 L30 LO4 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	9248	52,7	175	80+	3000	3,7
Shop A LED1x11350 J569 T830 L30 LO5 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	10638	61,8	172	80+	3000	3,7
Shop A LED1x5700 J565 T840 L30 LO1 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	5635	32,4	174	80+	4000	3,7
Shop A LED1x7900 J566 T840 L30 LO2 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7808	46,5	168	80+	4000	3,7
Shop A LED1x8300 J567 T840 L30 LO3 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	8198	44,1	186	80+	4000	3,7
Shop A LED1x9900 J568 T840 L30 LO4 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	9748	52,7	185	80+	4000	3,7
Shop A LED1x11350 J569 T840 L30 LO5 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	11213	61,8	181	80+	4000	3,7
Shop A LED1x5700 J565 T830 L30 LO1 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	5346	32,4	165	80+	3000	3,7
Shop A LED1x7900 J566 T830 L30 LO2 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7407	46,5	159	80+	3000	3,7
Shop A LED1x8300 J567 T830 L30 LO3 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7778	44,1	176	80+	3000	3,7
Shop A LED1x9900 J568 T830 L30 LO4 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	9248	52,7	175	80+	3000	3,7
Shop A LED1x11350 J569 T830 L30 LO5 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	10638	61,8	172	80+	3000	3,7
Shop A LED1x5700 J565 T840 L30 LO1 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	5635	32,4	174	80+	4000	3,7
Shop A LED1x7900 J566 T840 L30 LO2 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7808	46,5	168	80+	4000	3,7
Shop A LED1x8300 J567 T840 L30 LO3 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	8198	44,1	186	80+	4000	3,7
Shop A LED1x9900 J568 T840 L30 LO4 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	9748	52,7	185	80+	4000	3,7
Shop A LED1x11350 J569 T840 L30 LO5 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	11213	61,8	181	80+	4000	3,7
Shop A LED1x5700 J178 T830 L40x75 LO1 L1 L-BRANCH LL CORNER180	1132	615	65	5346	32,4	165	80+	3000	4,1
Shop A LED1x7900 J179 T830 L40x75 LO2 L1 L-BRANCH LL CORNER180	1132	615	65	7407	46,5	159	80+	3000	4,1
Shop A LED1x8300 J180 T830 L40x75 LO3 L1 L-BRANCH LL CORNER180	1132	615	65	7778	44,1	176	80+	3000	4,1
Shop A LED1x9900 J181 T830 L40x75 LO4 L1 L-BRANCH LL CORNER180	1132	615	65	9248	52,7	175	80+	3000	4,1
Shop A LED1x11350 J182 T830 L40x75 LO5 L1 L-BRANCH LL CORNER180	1132	615	65	10638	61,8	172	80+	3000	4,1
Shop A LED1x5700 J178 T840 L40x75 LO1 L1 L-BRANCH LL CORNER180	1132	615	65	5635	32,4	174	80+	4000	4,1
Shop A LED1x7900 J179 T840 L40x75 LO2 L1 L-BRANCH LL CORNER180	1132	615	65	7808	46,5	168	80+	4000	4,1
Shop A LED1x8300 J180 T840 L40x75 LO3 L1 L-BRANCH LL CORNER180	1132	615	65	8198	44,1	186	80+	4000	4,1
Shop A LED1x9900 J181 T840 L40x75 LO4 L1 L-BRANCH LL CORNER180	1132	615	65	9748	52,7	185	80+	4000	4,1
Shop A LED1x11350 J182 T840 L40x75 LO5 L1 L-BRANCH LL CORNER180	1132	615	65	11213	61,8	181	80+	4000	4,1
Shop A LED1x5700 J178 T830 L40x75 LO1 L1 R-BRANCH LL CORNER180	1132	615	65	5346	32,4	165	80+	3000	4,1
Shop A LED1x7900 J179 T830 L40x75 LO2 L1 R-BRANCH LL CORNER180	1132	615	65	7407	46,5	159	80+	3000	4,1
Shop A LED1x8300 J180 T830 L40x75 LO3 L1 R-BRANCH LL CORNER180	1132	615	65	7778	44,1	176	80+	3000	4,1
Shop A LED1x9900 J181 T830 L40x75 LO4 L1 R-BRANCH LL CORNER180	1132	615	65	9248	52,7	175	80+	3000	4,1
Shop A LED1x11350 J182 T830 L40x75 LO5 L1 R-BRANCH LL CORNER180	1132	615	65	10638	61,8	172	80+	3000	4,1
Shop A LED1x5700 J178 T840 L40x75 LO1 L1 R-BRANCH LL CORNER180	1132	615	65	5635	32,4	174	80+	4000	4,1
Shop A LED1x7900 J179 T840 L40x75 LO2 L1 R-BRANCH LL CORNER180	1132	615	65	7808	46,5	168	80+	4000	4,1
Shop A LED1x8300 J180 T840 L40x75 LO3 L1 R-BRANCH LL CORNER180	1132	615	65	8198	44,1	186	80+	4000	4,1
Shop A LED1x9900 J181 T840 L40x75 LO4 L1 R-BRANCH LL CORNER180	1132	615	65	9748	52,7	185	80+	4000	4,1
Shop A LED1x11350 J182 T840 L40x75 LO5 L1 R-BRANCH LL CORNER180	1132	615	65	11213	61,8	181	80+	4000	4,1
Shop A LED1x5700 J565 T830 L40x75 LO1 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	5346	32,4	165	80+	3000	3,7
Shop A LED1x7900 J566 T830 L40x75 LO2 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7407	46,5	159	80+	3000	3,7
Shop A LED1x8300 J567 T830 L40x75 LO3 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7778	44,1	176	80+	3000	3,7

Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI* (Ra)	CCT*, K	Weight, kg
Shop A LED1x9900 J568 T830 L40x75 LO4 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	9248	52,7	175	80+	3000	3,7
Shop A LED1x11350 J569 T830 L40x75 LO5 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	10638	61,8	172	80+	3000	3,7
Shop A LED1x5700 J565 T840 L40x75 LO1 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	5635	32,4	174	80+	4000	3,7
Shop A LED1x7900 J566 T840 L40x75 LO2 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7808	46,5	168	80+	4000	3,7
Shop A LED1x8300 J567 T840 L40x75 LO3 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	8198	44,1	186	80+	4000	3,7
Shop A LED1x9900 J568 T840 L40x75 LO4 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	9748	52,7	185	80+	4000	3,7
Shop A LED1x11350 J569 T840 L40x75 LO5 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	11213	61,8	181	80+	4000	3,7
Shop A LED1x5700 J565 T830 L40x75 LO1 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	5346	32,4	165	80+	3000	3,7
Shop A LED1x7900 J566 T830 L40x75 LO2 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7407	46,5	159	80+	3000	3,7
Shop A LED1x8300 J567 T830 L40x75 LO3 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7778	44,1	176	80+	3000	3,7
Shop A LED1x9900 J568 T830 L40x75 LO4 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	9248	52,7	175	80+	3000	3,7
Shop A LED1x11350 J569 T830 L40x75 LO5 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	10638	61,8	172	80+	3000	3,7
Shop A LED1x5700 J565 T840 L40x75 LO1 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	5635	32,4	174	80+	4000	3,7
Shop A LED1x7900 J566 T840 L40x75 LO2 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7808	46,5	168	80+	4000	3,7
Shop A LED1x8300 J567 T840 L40x75 LO3 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	8198	44,1	186	80+	4000	3,7
Shop A LED1x9900 J568 T840 L40x75 LO4 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	9748	52,7	185	80+	4000	3,7
Shop A LED1x11350 J569 T840 L40x75 LO5 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	11213	61,8	181	80+	4000	3,7
Shop A LED1x5700 J178 T830 L75 LO1 L1 L-BRANCH LL CORNER180	1132	615	65	5403	32,4	167	80+	3000	4,1
Shop A LED1x7900 J179 T830 L75 LO2 L1 L-BRANCH LL CORNER180	1132	615	65	7485	46,5	161	80+	3000	4,1
Shop A LED1x8300 J180 T830 L75 LO3 L1 L-BRANCH LL CORNER180	1132	615	65	7860	44,1	178	80+	3000	4,1
Shop A LED1x9900 J181 T830 L75 LO4 L1 L-BRANCH LL CORNER180	1132	615	65	9345	52,7	177	80+	3000	4,1
Shop A LED1x11350 J182 T830 L75 LO5 L1 L-BRANCH LL CORNER180	1132	615	65	10750	61,8	174	80+	3000	4,1
Shop A LED1x5700 J178 T840 L75 LO1 L1 L-BRANCH LL CORNER180	1132	615	65	5695	32,4	176	80+	4000	4,1
Shop A LED1x7900 J179 T840 L75 LO2 L1 L-BRANCH LL CORNER180	1132	615	65	7890	46,5	170	80+	4000	4,1
Shop A LED1x8300 J180 T840 L75 LO3 L1 L-BRANCH LL CORNER180	1132	615	65	8285	44,1	188	80+	4000	4,1
Shop A LED1x9900 J181 T840 L75 LO4 L1 L-BRANCH LL CORNER180	1132	615	65	9851	52,7	187	80+	4000	4,1
Shop A LED1x11350 J182 T840 L75 LO5 L1 L-BRANCH LL CORNER180	1132	615	65	11331	61,8	183	80+	4000	4,1
Shop A LED1x5700 J178 T830 L75 LO1 L1 R-BRANCH LL CORNER180	1132	615	65	5403	32,4	167	80+	3000	4,1
Shop A LED1x7900 J179 T830 L75 LO2 L1 R-BRANCH LL CORNER180	1132	615	65	7485	46,5	161	80+	3000	4,1
Shop A LED1x8300 J180 T830 L75 LO3 L1 R-BRANCH LL CORNER180	1132	615	65	7860	44,1	178	80+	3000	4,1
Shop A LED1x9900 J181 T830 L75 LO4 L1 R-BRANCH LL CORNER180	1132	615	65	9345	52,7	177	80+	3000	4,1
Shop A LED1x11350 J182 T830 L75 LO5 L1 R-BRANCH LL CORNER180	1132	615	65	10750	61,8	174	80+	3000	4,1
Shop A LED1x5700 J178 T840 L75 LO1 L1 R-BRANCH LL CORNER180	1132	615	65	5695	32,4	176	80+	4000	4,1
Shop A LED1x7900 J179 T840 L75 LO2 L1 R-BRANCH LL CORNER180	1132	615	65	7890	46,5	170	80+	4000	4,1
Shop A LED1x8300 J180 T840 L75 LO3 L1 R-BRANCH LL CORNER180	1132	615	65	8285	44,1	188	80+	4000	4,1
Shop A LED1x9900 J181 T840 L75 LO4 L1 R-BRANCH LL CORNER180	1132	615	65	9851	52,7	187	80+	4000	4,1
Shop A LED1x11350 J182 T840 L75 LO5 L1 R-BRANCH LL CORNER180	1132	615	65	11331	61,8	183	80+	4000	4,1
Shop A LED1x5700 J565 T830 L75 LO1 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	4716	27,3	173	80+	3000	3,7
Shop A LED1x7900 J566 T830 L75 LO2 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	5607	32,7	171	80+	3000	3,7
Shop A LED1x8300 J567 T830 L75 LO3 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	6450	37,5	172	80+	3000	3,7
Shop A LED1x9900 J568 T830 L75 LO4 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	3417	18,6	184	80+	3000	3,7
Shop A LED1x11350 J569 T830 L75 LO5 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	4734	27,0	175	80+	3000	3,7
Shop A LED1x5700 J565 T840 L75 LO1 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	3417	19,4	176	80+	4000	3,7
Shop A LED1x7900 J566 T840 L75 LO2 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	4734	27,9	170	80+	4000	3,7
Shop A LED1x8300 J567 T840 L75 LO3 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	4971	26,4	188	80+	4000	3,7
Shop A LED1x9900 J568 T840 L75 LO4 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	5910	31,6	187	80+	4000	3,7

Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI* (Ra)	CCT*, K	Weight, kg
Shop A LED1x11350 J569 T840 L75 LO5 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	6798	37,1	183	80+	4000	3,7
Shop A LED1x5700 J565 T830 L75 LO1 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	5403	32,4	167	80+	3000	3,7
Shop A LED1x7900 J566 T830 L75 LO2 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7485	46,5	161	80+	3000	3,7
Shop A LED1x8300 J567 T830 L75 LO3 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7860	44,1	178	80+	3000	3,7
Shop A LED1x9900 J568 T830 L75 LO4 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	9345	52,7	177	80+	3000	3,7
Shop A LED1x11350 J569 T830 L75 LO5 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	10750	61,8	174	80+	3000	3,7
Shop A LED1x5700 J565 T840 L75 LO1 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	5695	32,4	176	80+	4000	3,7
Shop A LED1x7900 J566 T840 L75 LO2 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7890	46,5	170	80+	4000	3,7
Shop A LED1x8300 J567 T840 L75 LO3 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	8285	44,1	188	80+	4000	3,7
Shop A LED1x9900 J568 T840 L75 LO4 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	9851	52,7	187	80+	4000	3,7
Shop A LED1x11350 J569 T840 L75 LO5 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	11331	61,8	183	80+	4000	3,7
Shop A LED1x5700 J178 T830 L75W LO1 L1 L-BRANCH LL CORNER180	1132	615	65	5403	32,4	167	80+	3000	4,1
Shop A LED1x7900 J179 T830 L75W LO2 L1 L-BRANCH LL CORNER180	1132	615	65	7485	46,5	161	80+	3000	4,1
Shop A LED1x8300 J180 T830 L75W LO3 L1 L-BRANCH LL CORNER180	1132	615	65	7860	44,1	178	80+	3000	4,1
Shop A LED1x9900 J181 T830 L75W LO4 L1 L-BRANCH LL CORNER180	1132	615	65	9345	52,7	177	80+	3000	4,1
Shop A LED1x11350 J182 T830 L75W LO5 L1 L-BRANCH LL CORNER180	1132	615	65	10750	61,8	174	80+	3000	4,1
Shop A LED1x5700 J178 T840 L75W LO1 L1 L-BRANCH LL CORNER180	1132	615	65	5695	32,4	176	80+	4000	4,1
Shop A LED1x7900 J179 T840 L75W LO2 L1 L-BRANCH LL CORNER180	1132	615	65	7890	46,5	170	80+	4000	4,1
Shop A LED1x8300 J180 T840 L75W LO3 L1 L-BRANCH LL CORNER180	1132	615	65	8285	44,1	188	80+	4000	4,1
Shop A LED1x9900 J181 T840 L75W LO4 L1 L-BRANCH LL CORNER180	1132	615	65	9851	52,7	187	80+	4000	4,1
Shop A LED1x11350 J182 T840 L75W LO5 L1 L-BRANCH LL CORNER180	1132	615	65	11331	61,8	183	80+	4000	4,1
Shop A LED1x5700 J178 T830 L75W LO1 L1 R-BRANCH LL CORNER180	1132	615	65	5403	32,4	167	80+	3000	4,1
Shop A LED1x7900 J179 T830 L75W LO2 L1 R-BRANCH LL CORNER180	1132	615	65	7485	46,5	161	80+	3000	4,1
Shop A LED1x8300 J180 T830 L75W LO3 L1 R-BRANCH LL CORNER180	1132	615	65	7860	44,1	178	80+	3000	4,1
Shop A LED1x9900 J181 T830 L75W LO4 L1 R-BRANCH LL CORNER180	1132	615	65	9345	52,7	177	80+	3000	4,1
Shop A LED1x11350 J182 T830 L75W LO5 L1 R-BRANCH LL CORNER180	1132	615	65	10750	61,8	174	80+	3000	4,1
Shop A LED1x5700 J178 T840 L75W LO1 L1 R-BRANCH LL CORNER180	1132	615	65	5695	32,4	176	80+	4000	4,1
Shop A LED1x7900 J179 T840 L75W LO2 L1 R-BRANCH LL CORNER180	1132	615	65	7890	46,5	170	80+	4000	4,1
Shop A LED1x8300 J180 T840 L75W LO3 L1 R-BRANCH LL CORNER180	1132	615	65	8285	44,1	188	80+	4000	4,1
Shop A LED1x9900 J181 T840 L75W LO4 L1 R-BRANCH LL CORNER180	1132	615	65	9851	52,7	187	80+	4000	4,1
Shop A LED1x11350 J182 T840 L75W LO5 L1 R-BRANCH LL CORNER180	1132	615	65	11331	61,8	183	80+	4000	4,1
Shop A LED1x5700 J565 T830 L75W LO1 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	5403	32,4	167	80+	3000	3,7
Shop A LED1x7900 J566 T830 L75W LO2 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7485	46,5	161	80+	3000	3,7
Shop A LED1x8300 J567 T830 L75W LO3 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7860	44,1	178	80+	3000	3,7
Shop A LED1x9900 J568 T830 L75W LO4 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	9345	52,7	177	80+	3000	3,7
Shop A LED1x11350 J569 T830 L75W LO5 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	10750	61,8	174	80+	3000	3,7
Shop A LED1x5700 J565 T840 L75W LO1 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	5695	32,4	176	80+	4000	3,7
Shop A LED1x7900 J566 T840 L75W LO2 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7890	46,5	170	80+	4000	3,7
Shop A LED1x8300 J567 T840 L75W LO3 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	8285	44,1	188	80+	4000	3,7
Shop A LED1x9900 J568 T840 L75W LO4 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	9851	52,7	187	80+	4000	3,7
Shop A LED1x11350 J569 T840 L75W LO5 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	11331	61,8	183	80+	4000	3,7
Shop A LED1x5700 J565 T830 L75W LO1 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	5403	32,4	167	80+	3000	3,7
Shop A LED1x7900 J566 T830 L75W LO2 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7485	46,5	161	80+	3000	3,7
Shop A LED1x8300 J567 T830 L75W LO3 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7860	44,1	178	80+	3000	3,7
Shop A LED1x9900 J568 T830 L75W LO4 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	9345	52,7	177	80+	3000	3,7
Shop A LED1x11350 J569 T830 L75W LO5 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	10750	61,8	174	80+	3000	3,7

Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power *, W	System efficacy*, lm/W	CRI * (Ra)	CCT*, K	Weight, kg
Shop A LED1x5700 J565 T840 L75W LO1 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	5695	32,4	176	80+	4000	3,7
Shop A LED1x7900 J566 T840 L75W LO2 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7890	46,5	170	80+	4000	3,7
Shop A LED1x8300 J567 T840 L75W LO3 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	8285	44,1	188	80+	4000	3,7
Shop A LED1x9900 J568 T840 L75W LO4 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	9851	52,7	187	80+	4000	3,7
Shop A LED1x11350 J569 T840 L75W LO5 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	11331	61,8	183	80+	4000	3,7
Shop A LED1x5700 J178 T830 L90W LO1 L1 L-BRANCH LL CORNER180	1132	615	65	5403	32,4	167	80+	3000	4,1
Shop A LED1x7900 J179 T830 L90W LO2 L1 L-BRANCH LL CORNER180	1132	615	65	7485	46,5	161	80+	3000	4,1
Shop A LED1x8300 J180 T830 L90W LO3 L1 L-BRANCH LL CORNER180	1132	615	65	7860	44,1	178	80+	3000	4,1
Shop A LED1x9900 J181 T830 L90W LO4 L1 L-BRANCH LL CORNER180	1132	615	65	9345	52,7	177	80+	3000	4,1
Shop A LED1x11350 J182 T830 L90W LO5 L1 L-BRANCH LL CORNER180	1132	615	65	10750	61,8	174	80+	3000	4,1
Shop A LED1x5700 J178 T840 L90W LO1 L1 L-BRANCH LL CORNER180	1132	615	65	5695	32,4	176	80+	4000	4,1
Shop A LED1x7900 J179 T840 L90W LO2 L1 L-BRANCH LL CORNER180	1132	615	65	7890	46,5	170	80+	4000	4,1
Shop A LED1x8300 J180 T840 L90W LO3 L1 L-BRANCH LL CORNER180	1132	615	65	8285	44,1	188	80+	4000	4,1
Shop A LED1x9900 J181 T840 L90W LO4 L1 L-BRANCH LL CORNER180	1132	615	65	9851	52,7	187	80+	4000	4,1
Shop A LED1x11350 J182 T840 L90W LO5 L1 L-BRANCH LL CORNER180	1132	615	65	11331	61,8	183	80+	4000	4,1
Shop A LED1x5700 J178 T830 L90 LO1 L1 R-BRANCH LL CORNER180	1132	615	65	5403	32,4	167	80+	3000	4,1
Shop A LED1x7900 J179 T830 L90 LO2 L1 R-BRANCH LL CORNER180	1132	615	65	7485	46,5	161	80+	3000	4,1
Shop A LED1x8300 J180 T830 L90 LO3 L1 R-BRANCH LL CORNER180	1132	615	65	7860	44,1	178	80+	3000	4,1
Shop A LED1x9900 J181 T830 L90 LO4 L1 R-BRANCH LL CORNER180	1132	615	65	9345	52,7	177	80+	3000	4,1
Shop A LED1x11350 J182 T830 L90 LO5 L1 R-BRANCH LL CORNER180	1132	615	65	10750	61,8	174	80+	3000	4,1
Shop A LED1x5700 J178 T840 L90 LO1 L1 R-BRANCH LL CORNER180	1132	615	65	5695	32,4	176	80+	4000	4,1
Shop A LED1x7900 J179 T840 L90 LO2 L1 R-BRANCH LL CORNER180	1132	615	65	7890	46,5	170	80+	4000	4,1
Shop A LED1x8300 J180 T840 L90 LO3 L1 R-BRANCH LL CORNER180	1132	615	65	8285	44,1	188	80+	4000	4,1
Shop A LED1x9900 J181 T840 L90 LO4 L1 R-BRANCH LL CORNER180	1132	615	65	9851	52,7	187	80+	4000	4,1
Shop A LED1x11350 J182 T840 L90 LO5 L1 R-BRANCH LL CORNER180	1132	615	65	11331	61,8	183	80+	4000	4,1
Shop A LED1x5700 J565 T830 L90W LO1 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	5403	32,4	167	80+	3000	3,7
Shop A LED1x7900 J566 T830 L90W LO2 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7485	46,5	161	80+	3000	3,7
Shop A LED1x8300 J567 T830 L90W LO3 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7860	44,1	178	80+	3000	3,7
Shop A LED1x9900 J568 T830 L90W LO4 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	9345	52,7	177	80+	3000	3,7
Shop A LED1x11350 J569 T830 L90W LO5 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	10750	61,8	174	80+	3000	3,7
Shop A LED1x5700 J565 T840 L90W LO1 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	5695	32,4	176	80+	4000	3,7
Shop A LED1x7900 J566 T840 L90W LO2 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7890	46,5	170	80+	4000	3,7
Shop A LED1x8300 J567 T840 L90W LO3 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	8285	44,1	188	80+	4000	3,7
Shop A LED1x9900 J568 T840 L90W LO4 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	9851	52,7	187	80+	4000	3,7
Shop A LED1x11350 J569 T840 L90W LO5 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	11331	61,8	183	80+	4000	3,7
Shop A LED1x5700 J565 T830 L90W LO1 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	5403	32,4	167	80+	3000	3,7
Shop A LED1x7900 J566 T830 L90W LO2 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7485	46,5	161	80+	3000	3,7
Shop A LED1x8300 J567 T830 L90W LO3 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7860	44,1	178	80+	3000	3,7
Shop A LED1x9900 J568 T830 L90W LO4 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	9345	52,7	177	80+	3000	3,7
Shop A LED1x11350 J569 T830 L90W LO5 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	10750	61,8	174	80+	3000	3,7
Shop A LED1x5700 J565 T840 L90W LO1 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	5695	32,4	176	80+	4000	3,7
Shop A LED1x7900 J566 T840 L90W LO2 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7890	46,5	170	80+	4000	3,7
Shop A LED1x8300 J567 T840 L90W LO3 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	8285	44,1	188	80+	4000	3,7
Shop A LED1x9900 J568 T840 L90W LO4 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	9851	52,7	187	80+	4000	3,7
Shop A LED1x11350 J569 T840 L90W LO5 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	11331	61,8	183	80+	4000	3,7
Shop A LED1x5700 J178 T830 L100 LO1 L1 L-BRANCH LL CORNER180	1132	615	65	5234	32,4	162	80+	3000	4,1

Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI* (Ra)	CCT*, K	Weight, kg
Shop A LED1x7900 J179 T830 L100 LO2 L1 L-BRANCH LL CORNER180	1132	615	65	7251	46,5	156	80+	3000	4,1
Shop A LED1x8300 J180 T830 L100 LO3 L1 L-BRANCH LL CORNER180	1132	615	65	7614	44,1	173	80+	3000	4,1
Shop A LED1x9900 J181 T830 L100 LO4 L1 L-BRANCH LL CORNER180	1132	615	65	9053	52,7	172	80+	3000	4,1
Shop A LED1x11350 J182 T830 L100 LO5 L1 L-BRANCH LL CORNER180	1132	615	65	10414	61,8	169	80+	3000	4,1
Shop A LED1x5700 J178 T840 L100 LO1 L1 L-BRANCH LL CORNER180	1132	615	65	5517	32,4	170	80+	4000	4,1
Shop A LED1x7900 J179 T840 L100 LO2 L1 L-BRANCH LL CORNER180	1132	615	65	7643	46,5	164	80+	4000	4,1
Shop A LED1x8300 J180 T840 L100 LO3 L1 L-BRANCH LL CORNER180	1132	615	65	8026	44,1	182	80+	4000	4,1
Shop A LED1x9900 J181 T840 L100 LO4 L1 L-BRANCH LL CORNER180	1132	615	65	9543	52,7	181	80+	4000	4,1
Shop A LED1x11350 J182 T840 L100 LO5 L1 L-BRANCH LL CORNER180	1132	615	65	10977	61,8	178	80+	4000	4,1
Shop A LED1x5700 J178 T830 L100 LO1 L1 R-BRANCH LL CORNER180	1132	615	65	5234	32,4	162	80+	3000	4,1
Shop A LED1x7900 J179 T830 L100 LO2 L1 R-BRANCH LL CORNER180	1132	615	65	7251	46,5	156	80+	3000	4,1
Shop A LED1x8300 J180 T830 L100 LO3 L1 R-BRANCH LL CORNER180	1132	615	65	7614	44,1	173	80+	3000	4,1
Shop A LED1x9900 J181 T830 L100 LO4 L1 R-BRANCH LL CORNER180	1132	615	65	9053	52,7	172	80+	3000	4,1
Shop A LED1x11350 J182 T830 L100 LO5 L1 R-BRANCH LL CORNER180	1132	615	65	10414	61,8	169	80+	3000	4,1
Shop A LED1x5700 J178 T840 L100 LO1 L1 R-BRANCH LL CORNER180	1132	615	65	5517	32,4	170	80+	4000	4,1
Shop A LED1x7900 J179 T840 L100 LO2 L1 R-BRANCH LL CORNER180	1132	615	65	7643	46,5	164	80+	4000	4,1
Shop A LED1x8300 J180 T840 L100 LO3 L1 R-BRANCH LL CORNER180	1132	615	65	8026	44,1	182	80+	4000	4,1
Shop A LED1x9900 J181 T840 L100 LO4 L1 R-BRANCH LL CORNER180	1132	615	65	9543	52,7	181	80+	4000	4,1
Shop A LED1x11350 J182 T840 L100 LO5 L1 R-BRANCH LL CORNER180	1132	615	65	10977	61,8	178	80+	4000	4,1
Shop A LED1x5700 J565 T830 L100 LO1 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	5234	32,4	162	80+	3000	3,7
Shop A LED1x7900 J566 T830 L100 LO2 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7251	46,5	156	80+	3000	3,7
Shop A LED1x8300 J567 T830 L100 LO3 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7614	44,1	173	80+	3000	3,7
Shop A LED1x9900 J568 T830 L100 LO4 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	9053	52,7	172	80+	3000	3,7
Shop A LED1x11350 J569 T830 L100 LO5 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	10414	61,8	169	80+	3000	3,7
Shop A LED1x5700 J565 T840 L100 LO1 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	5517	32,4	170	80+	4000	3,7
Shop A LED1x7900 J566 T840 L100 LO2 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7643	46,5	164	80+	4000	3,7
Shop A LED1x8300 J567 T840 L100 LO3 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	8026	44,1	182	80+	4000	3,7
Shop A LED1x9900 J568 T840 L100 LO4 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	9543	52,7	181	80+	4000	3,7
Shop A LED1x11350 J569 T840 L100 LO5 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	10977	61,8	178	80+	4000	3,7
Shop A LED1x5700 J565 T830 L100 LO1 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	5234	32,4	162	80+	3000	3,7
Shop A LED1x7900 J566 T830 L100 LO2 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7251	46,5	156	80+	3000	3,7
Shop A LED1x8300 J567 T830 L100 LO3 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7614	44,1	173	80+	3000	3,7
Shop A LED1x9900 J568 T830 L100 LO4 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	9053	52,7	172	80+	3000	3,7
Shop A LED1x11350 J569 T830 L100 LO5 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	10414	61,8	169	80+	3000	3,7
Shop A LED1x5700 J565 T840 L100 LO1 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	5517	32,4	170	80+	4000	3,7
Shop A LED1x7900 J566 T840 L100 LO2 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7643	46,5	164	80+	4000	3,7
Shop A LED1x8300 J567 T840 L100 LO3 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	8026	44,1	182	80+	4000	3,7
Shop A LED1x9900 J568 T840 L100 LO4 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	9543	52,7	181	80+	4000	3,7
Shop A LED1x11350 J569 T840 L100 LO5 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	10977	61,8	178	80+	4000	3,7
Shop A LED1x5700 J178 T830 L2A25 LO1 L1 L-BRANCH LL CORNER180	1132	615	65	5403	32,4	167	80+	3000	4,1
Shop A LED1x7900 J179 T830 L2A25 LO2 L1 L-BRANCH LL CORNER180	1132	615	65	7485	46,5	161	80+	3000	4,1
Shop A LED1x8300 J180 T830 L2A25 LO3 L1 L-BRANCH LL CORNER180	1132	615	65	7860	44,1	178	80+	3000	4,1
Shop A LED1x9900 J181 T830 L2A25 LO4 L1 L-BRANCH LL CORNER180	1132	615	65	9345	52,7	177	80+	3000	4,1
Shop A LED1x11350 J182 T830 L2A25 LO5 L1 L-BRANCH LL CORNER180	1132	615	65	10750	61,8	174	80+	3000	4,1
Shop A LED1x5700 J178 T840 L2A25 LO1 L1 L-BRANCH LL CORNER180	1132	615	65	5695	32,4	176	80+	4000	4,1
Shop A LED1x7900 J179 T840 L2A25 LO2 L1 L-BRANCH LL CORNER180	1132	615	65	7890	46,5	170	80+	4000	4,1

Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI* (Ra)	CCT*, K	Weight, kg
Shop A LED1x8300 J180 T840 L2A25 LO3 L1 L-BRANCH LL CORNER180	1132	615	65	8285	44,1	188	80+	4000	4,1
Shop A LED1x9900 J181 T840 L2A25 LO4 L1 L-BRANCH LL CORNER180	1132	615	65	9851	52,7	187	80+	4000	4,1
Shop A LED1x11350 J182 T840 L2A25 LO5 L1 L-BRANCH LL CORNER180	1132	615	65	11331	61,8	183	80+	4000	4,1
Shop A LED1x5700 J178 T830 L2A25 LO1 L1 R-BRANCH LL CORNER180	1132	615	65	5403	32,4	167	80+	3000	4,1
Shop A LED1x7900 J179 T830 L2A25 LO2 L1 R-BRANCH LL CORNER180	1132	615	65	7485	46,5	161	80+	3000	4,1
Shop A LED1x8300 J180 T830 L2A25 LO3 L1 R-BRANCH LL CORNER180	1132	615	65	7860	44,1	178	80+	3000	4,1
Shop A LED1x9900 J181 T830 L2A25 LO4 L1 R-BRANCH LL CORNER180	1132	615	65	9345	52,7	177	80+	3000	4,1
Shop A LED1x11350 J182 T830 L2A25 LO5 L1 R-BRANCH LL CORNER180	1132	615	65	10750	61,8	174	80+	3000	4,1
Shop A LED1x5700 J178 T840 L2A25 LO1 L1 R-BRANCH LL CORNER180	1132	615	65	5695	32,4	176	80+	4000	4,1
Shop A LED1x7900 J179 T840 L2A25 LO2 L1 R-BRANCH LL CORNER180	1132	615	65	7890	46,5	170	80+	4000	4,1
Shop A LED1x8300 J180 T840 L2A25 LO3 L1 R-BRANCH LL CORNER180	1132	615	65	8285	44,1	188	80+	4000	4,1
Shop A LED1x9900 J181 T840 L2A25 LO4 L1 R-BRANCH LL CORNER180	1132	615	65	9851	52,7	187	80+	4000	4,1
Shop A LED1x11350 J182 T840 L2A25 LO5 L1 R-BRANCH LL CORNER180	1132	615	65	11331	61,8	183	80+	4000	4,1
Shop A LED1x5700 J565 T830 L2A25 LO1 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	5403	32,4	167	80+	3000	3,7
Shop A LED1x7900 J566 T830 L2A25 LO2 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7485	46,5	161	80+	3000	3,7
Shop A LED1x8300 J567 T830 L2A25 LO3 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7860	44,1	178	80+	3000	3,7
Shop A LED1x9900 J568 T830 L2A25 LO4 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	9345	52,7	177	80+	3000	3,7
Shop A LED1x11350 J569 T830 L2A25 LO5 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	10750	61,8	174	80+	3000	3,7
Shop A LED1x5700 J565 T840 L2A25 LO1 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	5695	32,4	176	80+	4000	3,7
Shop A LED1x7900 J566 T840 L2A25 LO2 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	7890	46,5	170	80+	4000	3,7
Shop A LED1x8300 J567 T840 L2A25 LO3 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	8285	44,1	188	80+	4000	3,7
Shop A LED1x9900 J568 T840 L2A25 LO4 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	9851	52,7	187	80+	4000	3,7
Shop A LED1x11350 J569 T840 L2A25 LO5 L1 L-CTR-BRANCH LL CORNER180	1185	571	65	11331	61,8	183	80+	4000	3,7
Shop A LED1x5700 J565 T830 L2A25 LO1 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	5403	32,4	167	80+	3000	3,7
Shop A LED1x7900 J566 T830 L2A25 LO2 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7485	46,5	161	80+	3000	3,7
Shop A LED1x8300 J567 T830 L2A25 LO3 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7860	44,1	178	80+	3000	3,7
Shop A LED1x9900 J568 T830 L2A25 LO4 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	9345	52,7	177	80+	3000	3,7
Shop A LED1x11350 J569 T830 L2A25 LO5 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	10750	61,8	174	80+	3000	3,7
Shop A LED1x5700 J565 T840 L2A25 LO1 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	5695	32,4	176	80+	4000	3,7
Shop A LED1x7900 J566 T840 L2A25 LO2 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	7890	46,5	170	80+	4000	3,7
Shop A LED1x8300 J567 T840 L2A25 LO3 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	8285	44,1	188	80+	4000	3,7
Shop A LED1x9900 J568 T840 L2A25 LO4 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	9851	52,7	187	80+	4000	3,7
Shop A LED1x11350 J569 T840 L2A25 LO5 L1 R-CTR-BRANCH LL CORNER180	1185	571	65	11331	61,8	183	80+	4000	3,7

*Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification


*note - for versions: LO1, LO2 - only every second LED lights up

*note - plug is positioned at the longest end of the luminaire and socket(s) are out at each branch. If changes to be made please discuss project with your sales manager.

Available options:

T830 Colour temperature 3000K, CRI 80+
 T840 Colour temperature 4000K, CRI 80+
 T930 Colour temperature 3000K, CRI 90+
 T940 Colour temperature 4000K, CRI 90+
 L30 Optics with 30° beam angle
 L40x75 Optics with 40x75° beam angle
 L75W Optics with 75° beam angle, wide
 L75 Optics with 75° beam angle
 L90W Optics with 90° beam angle, wide
 L100 Optics with 100° beam angle, diffused

L2A25 Optics with double asymmetric beam
 L01...5 Light output level 1 to 5
 DALI 2WIE5D Driver with DALI interface and switch-control dimming. Two 5-pole DALI "Wieland - gesis classic" type or compatible connectors. Through wired, 3x1.5mm2 + 2x0.5mm2 (DALI).
 *note - with 2WIE5D option luminaire is through wired with only one phase.
 L1 Driver connected to L1 line
 L2 Driver connected to L2 line
 L3 Driver connected to L3 line
 LL for in-line connection intermediate luminaire
 RAL RAL colour

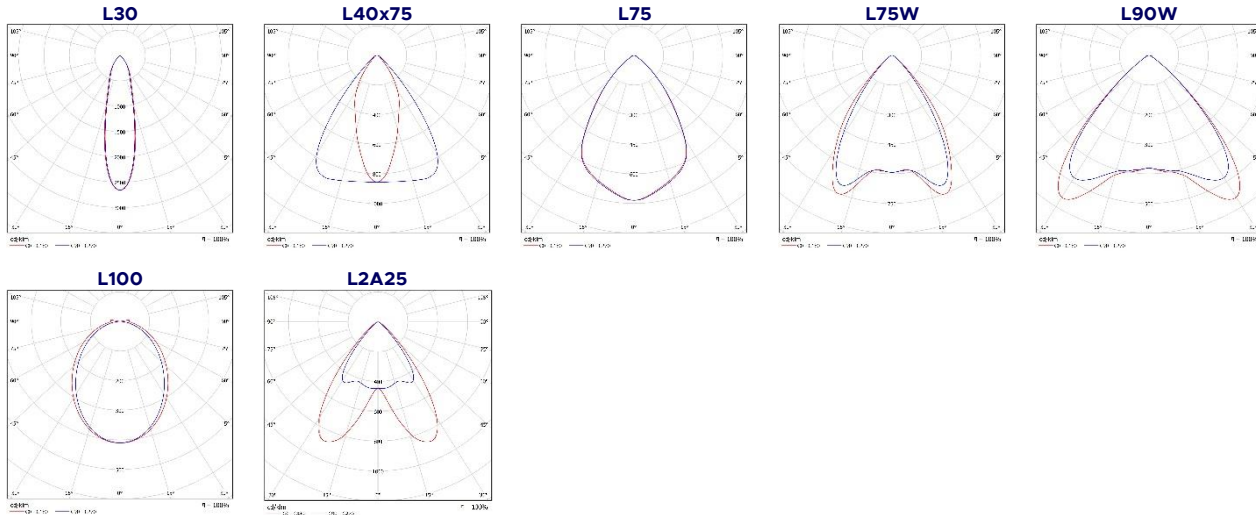

Available accessories:



Product: Power supply socket 1602/VCB-M-5 5x1.5-2.5mm²
 Description: 5-pole socket (Stucchi - 1602/VCB-M-5) for power supply, 1pcs
**note - please use power supply socket for first in-line luminaire connection to power source*



Product: Suspension MTG KIT SUSI
 Description: Suspension wire set "I" type, 1.5m adjustable, 1pcs
**note - 2pcs MTG SUSI KIT for length up to 2000mm, 3pcs MTG SUSI KIT for lengths 2000 - 3000mm*



Product: END CAP Shop LED RAL9003
 Description: End cap kit for Shop A LED luminaires, 1pcs (extra)



Product: CAP4, light grey/ white/ black
 Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 3x1x1.5mm², light grey/ white/ black



Product: BLANK Shop A LED L-CTR-BRANCH CORNER180 RAL9003
 Description: Blank part kit for connecting luminaires in-line "T" shaped with a centre branch to the left, 1pcs



Product: BLANK Shop A LED R-CTR-BRANCH CORNER180 RAL9003
 Description: Blank part kit for connecting luminaires in-line "T" shaped with a centre branch to the right, 1pcs



Product: CAP5, light grey/ white/ black
 Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 5x1x1.5mm², light grey/ white/ black



Product: CAP cable 3x0.75 2.0m, clear
 Description: Cable 3x0.75mm² for suspended luminaire up to 2.0 meters, transparent



Product: CAP cable clip D6.3mm SET clear
 Description: Cable and suspension wire clip set, 4pcs. For cable diameter up to 6,3mm and wire diameter 1mm



Product: BLANK Shop A LED L-BRANCH CORNER180 RAL9003
 Description: Blank part kit for connecting luminaires in-line "T" shaped with a branch to the left, 1pcs



Product: BLANK Shop A LED R-BRANCH CORNER180 RAL9003
 Description: Blank part kit for connecting luminaires in-line "T" shaped with a branch to the right, 1pcs