




LEPUS W LED

Emergency Lighting

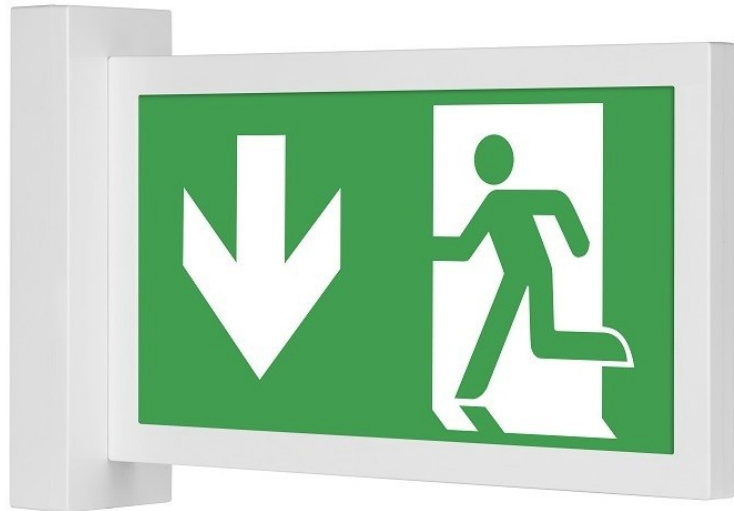

Images for the product family and options:

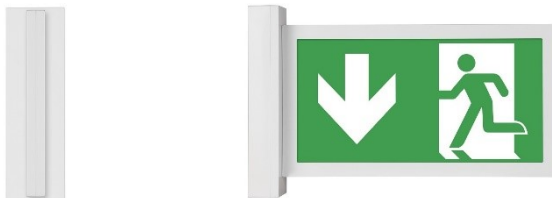

Description: Wall-mounted double-sided LED emergency exit sign / escape luminaire
 Light distribution type: omnidirectional
 Optical system: clear PMMA diffuser
 Housing: polycarbonate
 Colour: white
 Battery charging time: 24 hours (12 hours optional: AUT)
 Battery: NiCd (LiFePO₄ optional: AUT), deep discharge protection
 Recognition distance: 30 meters

General data: Mains voltage: 220-240V, 50-60Hz
 LED lifetime, h: 50000/L80B50
 SDCM: 3
 Protection class IEC: II
 Ingress protection code: IP40
 Mechanical impact resistance: IK05
 Operating temperature range, °C: ta 0...+40

Installation: On the wall. Push-in terminal, 3x2x2.5mm²

Environment: Indoor

Application: Emergency exit sign



Supplied with universal sticker kit.

Product	Length, mm	Width, mm	Height, mm	Illumination mode	Emergency operating time, h	Power in emergency mode, W*	CRI *	CCT, K*	Weight, kg
Lepus W 1PLED G066	377	72	232	M/NM	1	1	80+	6500	1,35
Lepus W 3PLED G067	377	72	232	M/NM	3	1	80+	6500	1,40
Lepus W 1PLED G066 TEST	377	72	232	M/NM	1	1	80+	6500	1,35
Lepus W 3PLED G067 TEST	377	72	232	M/NM	3	1	80+	6500	1,40
Lepus W 1PLED G066 AUT	377	72	232	M/NM	1	1	80+	6500	1,35
Lepus W 3PLED G067 AUT	377	72	232	M/NM	3	1	80+	6500	1,40
Lepus W CEBLED G068	377	72	232	CEB	-	1	80+	6500	1,40
Lepus W 1PLED G079 2CLR AUT	377	72	232	M/NM	1	3	80+	6500	1,35
Lepus W 3PLED G080 2CLR AUT	377	72	232	M/NM	3	3	80+	6500	1,40
Lepus W CEBLED G081 2CLR	377	72	232	CEB	-	3	80+	6500	1,40

*-M-maintained (with an option of connecting as non-maintained), NM- non-maintained, system power and output indicates data in emergency mode, tolerance range for optical and electrical data: ±10%, values apply to an ambient temperature of 25°C

TECHNICAL DATA SHEET

Available options:

DALI Driver with DALI interface
**note - DALI option is applicable for models: G066, G067*
TEST Manual test button
AUT Autonomous testing system
CEB Fitting to central battery system

CLV
EMS
LGREY
BLACK

Fitting to low voltage central battery system CEBLV
Fitting to emergency monitoring system
Light grey thermoplastic body
Black thermoplastic body